



The Tigo TS4-A-0 700w 15A Product Label Types – Australian Market

TS4-A-0


MAX. SYST. VOLTAGE (DC):
1500V UL/1000V IEC
MAX. INPUT/OUTPUT (DC):
80V, 15A, 700W

 Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 1234500575

 US


ANATEL: 13126-20-12100


4 - 103A453A



TS4-A-0


MAX. SYST. VOLTAGE (DC):
1500V
MAX. INPUT/OUTPUT (DC):
80V, 15A, 700W

 Distributed
Generation
Optimization
Module, Q110

 Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 1111236369


ANATEL: 13126-20-12100

4 - 103A453R




TS4-A-0

MAX. SYST. VOLTAGE (DC):
1500V
MAX. INPUT/OUTPUT (DC):
80V, 15A, 700W

 Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 1234500575

ANATEL: 13126-20-12100

4 - 103A453R



Tigo[®]

The Tigo TS4-A-0 500w 12A Product Label Types – Australian Market

TS4-A-0

MAX. SYST. VOLTAGE (DC):
1500V UL / 1000V TÜV

MAX. INPUT/OUTPUT (DC):
90V, 12A, 500W

UL US LISTED E469960

Distributed Generation Optimization Module, Q110


TÜVRheinland CERTIFIED

Type Approved Safety Regular Production Surveillance

www.tuv.com ID 1234500575

ANATEL: 13126-20-12100

4 - 103A453R

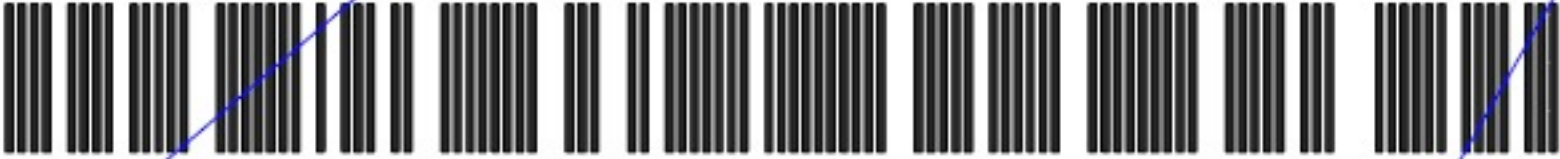

Comparing specs

	500W TS4-A-O	700W TS4-A-O
Wattage	500W	700W
Current	12A	15A
Voltage	16-90V	16-80V
Operating Temp	-40°C – 85°C	-40°C – 70°C
Rec. Fuse Rating	15A	30A
Min. Frame Thickness	1.8 mm	1.2 mm
Enclosure rating	IP68	
Max Elevation	2000m	
Dimensions	138.4mm x 139.7mm x 22.9mm	
Weight	520g	
Output cable length	1.2m	
Connectors	MC4, EVO2	

