

# FranklinWH Generator Module

Standby Generator Integration for Whole Home Energy Resilience



Smart

Simple

Flexible

Though solar energy is a clean and renewable way to supplement or replace grid power, sometimes there are extreme weather conditions where the grid goes down and the solar system isn't generating enough energy. Backup generators are a critical energy management source where those events are becoming more common. In the past, it has been difficult to integrate generators and solar power, but FranklinWH has addressed that need. The FranklinWH System provides the ability to smoothly switch between the grid, solar, generators and battery backup to provide robust home energy management.

Fast and reliable switchover to generator power during a grid failure is a major way in which the Generator Module benefits the household. In addition, generators can be noisy. During a longer outage, or when operating off-grid, generator auto start times can be scheduled through the FranklinWH app. You can run the generator during the day, when people aren't home, and switch to battery power at night, according to a pre-set schedule or through manual control.

Safe and reliable energy relies on multiple sources of power. The Generator Module adds generators to provide a complete home energy management solution.

## ✓ Integrated Power Management

The generator can both power home loads and charge the aPower X battery.

## ✓ Easy Installation

The Generator Module is an optional aGate X component which can be easily installed without requiring any external components.

## ✓ Wide Adaptability

Compatible with most models of standby generators. Applicable for new and retrofit installations.

## ✓ Better Experience

Seamless and automatic generator switchover and remote manual control via the app.

## Easy Installation

Compatible with any two-wire or utility sense standby generator, with or without ATS.


## Operating Modes

### Automatic

Set the aPower X battery State of Charge (SoC) limits for the generator to start and stop. The FranklinWH System will control the power sources to balance the generator and battery.

### Manual

Remotely start and stop the generator according to the household's immediate needs via the FranklinWH app.

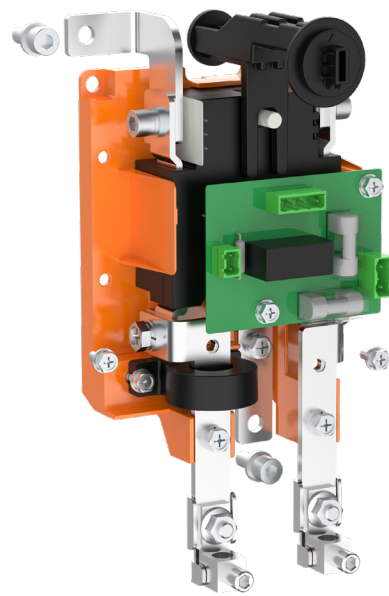

Generator Module

## Specification

AC Voltage	230 V / 240 V
Voltage Range	180 to 265V @240V
Maximum Continuous Current	80 A
Over Current Protection Device for the Generator Module	100 A Max.
Frequency Range	50 Hz ± 5 Hz
Voltage Measurement Accuracy	± 1%
Frequency Measurement Accuracy	± 0.01 Hz
Current Measurement Accuracy	± 1%
Ambient Temperature	- 20 to 50°C
User Interface	FranklinWH app
Operating Modes	Auto (Timed Charging Schedule based on battery's SoC)
	Manual Remote Control via FranklinWH app
Control Types	Utility Voltage Sensing
	Two-wire Dry Contact
	ATS (Auto transfer switch)
Dimensions (H × W × D)	210 x 120 x 70 mm
Weight	0.85 kg

**Website:** [www.franklinwh.com](http://www.franklinwh.com) **Email:** [info-au@franklinwh.com](mailto:info-au@franklinwh.com) **Telephone:** 1800 161 300 **Address:** Suite 4, Level 4, 4 Drake Avenue, Macquarie Park, NSW 2113

Copyright 2023 FranklinWH Australia Pty Ltd. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Australia Pty Ltd. 2026-03-25