

Cellular Plug-In

CELL-B-R0-GLO-Y-S0
CELL-B-R0-GLO-V-S0

COMMUNICATION



Cellular Internet Connectivity for Commercial and Residential Installations

- Compatible with SetApp-enabled inverters
- Connects SolarEdge inverters wirelessly to the internet
- No need for internet infrastructure at site
- Installed within the inverter enclosure for outdoor resilience, or in the communication gateway
- Supports high bandwidth monitoring of inverters, Power Optimizers, batteries, meters and weather stations
- Enables remote analysis and troubleshooting

/ Cellular Plug-In

CELL-B-R0-GLO-Y-S0

CELL-B-R0-GLO-V-S0

Model Number: CELL-B2

COMPATIBLE INVERTERS (With SetApp Configuration)		CELL-B-R0-GLO-V-S0 SExxK-xxxlxxx4 (excluding SExxK-xxxPlxxxx)	CELL-B-R0-GLO-Y-S0 SEXXXX-XXXXXBXX4, SEXXXX-XXXXBXX4	UNITS
Number of Monitored Inverters with a Single Cellular Plug-in		Commercial: Up to 32 inverters ⁽¹⁾ Residential: 1 inverter		
Monitoring		Data sampled every 5 minutes and sent to SolarEdge server continuously		
Monthly Data - per Inverter		7.8		MB
Monthly Data - per Optimizer		0.15		MB
Monthly Data - per Revenue Grade Meter		0.3		MB
Monthly Data - per Export or Consumption Meter		3		MB
Monthly Data - Commercial Gateway		3		MB
RF PERFORMANCE		OPERATING FREQUENCY		
		Band / Freq (MHz)	Modem Transmit / Modem received	
LTE Cat-1 FDD		2100 (B1)	1920-1980 / 2110-2170	MHz
		1800 (B3)	1710-1785 / 1805-1880	MHz
		2600 (B7)	2500-2570 / 2620-2690	MHz
		900 (B8)	880-915 / 925-960	MHz
		800 (B20)	832-862 / 791-821	MHz
		700 (B28A)	703-748 / 758-803	MHz
WCDMA		2100 (B1)	1920-1980 / 2110-2170	MHz
		900 (B8)	880-915 / 925-960	MHz
GSM		900 (EGSM)	880-915 / 925-960	MHz
		1800 (DCS)	1710.2-1784.8 / 1805.2-1879.8	MHz
Maximum Transmit Power	LTE FDD	23 dBm ± 2dB		
	WCDMA	24 dBm +1dB/-3dB		
	GSM	33 dBm ± 2dB		
Receiver Input Sensitivity Cat-1	LTE FDD	-97		dBm
	WCDMA	-109		
	GSM	-108.6		
Bandwidth		1.4 - 20 ⁽²⁾		MHz
Modulation	LTE	Downlink: QPSK\16QAM\64QAM, Uplink: QPSK\16QAM		MHz
	WCDMA	Downlink: QPSK, Uplink: BPSK		
	GSM	Downlink: GMSK, Uplink: GMSK		
ANTENNA				
Dual Antenna Bands		690-960 / 1710-2700		MHz
Antenna Type		Outdoor		
Antenna Connector		RP-SMA or N plug ⁽³⁾		
VSWR		≤4.0		
Gain		2		dBi
Polarization		Vertical		
Material		PC Lexan 503R-WH5151L or WH8G952 Sabic		
Dimensions (Length x Diameter)		7.87 x 0.78 / 200 x 20		in / mm
Cable Length	CELL-B-R0-GLO-Y-S0	52 / 130		in / cm
	CELL-B-R0-GLO-V-S0 ⁽⁴⁾	71 / 180		
STANDARD COMPLIANCE				
EMC and Radio		Global: GCF, Europe: CE, Australia & New Zealand: RCM, Russia: FAC		
RoHS		Yes		
INSTALLATION SPECIFICATIONS				
Dimensions (L x W x H)		3.07 x 1.27 x 0.55 / 78.2 x 32.5 x 14.2		in / mm
Operating Temperature		-40 to +85 / -40 to +185		°C / °F
Mounting		Built into the inverter or purchased separately		
Power Consumption		LTE: 2.8 (@23dBm output power) GSM: 2.4 (@33dBm output power) WCDMA: 2 (@24dBm output power)		W
SIM CARD HOLDER				
Type ⁽⁵⁾		Nano Sim		

* Information concerning the Data Plan's terms & conditions is available in the following link: <https://www.solaredge.com/sites/default/files/se-communication-plan-terms-and-conditions-eng.pdf>


- (1) For larger systems, use multiple cellular plug-ins
- (2) The exact value depends on actual operating band
- (3) Two types of antennas may be supplied interchangeably
- (4) Long antenna cable should be used with 3 phase Synergy technology inverter up to 120kW
- (5) Non-SolarEdge SIM cards must be LTE Cat-1 or GSM/WCDMA Cellular compatible

/ Cellular Plug-in

CELL-B-R0-GLO-Y-S0

CELL-B-R0-GLO-V-S0

Single or Multiple Commercial Inverters

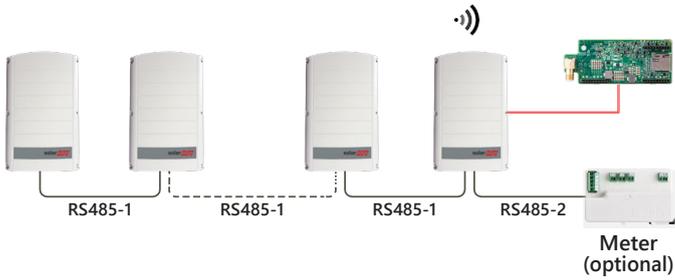

Cellular Tower



Monitoring Platform



Single or Multiple Residential Inverters

