
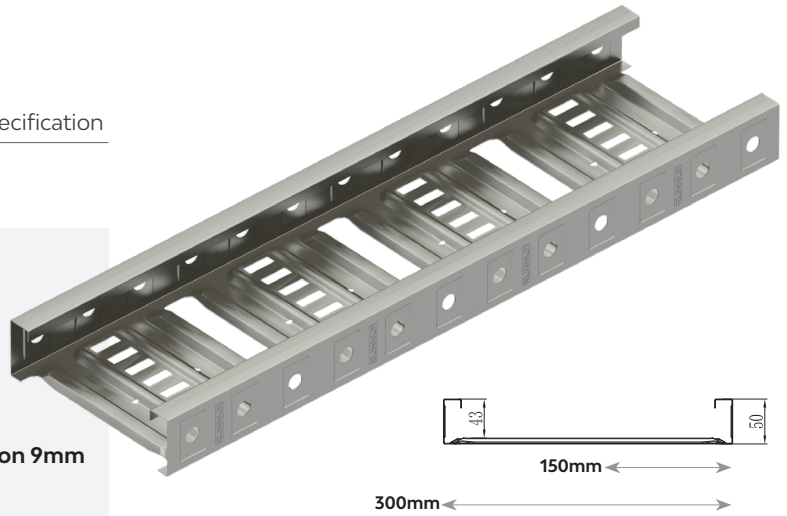


**Cable Tray**

Technical Specification

**Load Rating and Deflection**

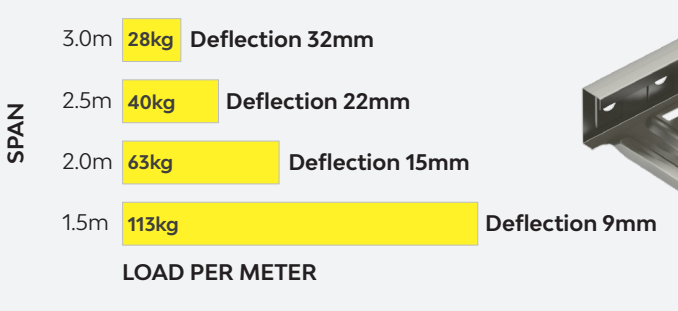

Part No. (Ordering Code)	Cable Laying Width (mm)	Cable Laying Depth (mm)	Overall Width (mm)	Side Rail Height (mm)	Weight (kg)	Packaging
CR1-CT150M	150	43	172	50	1.887/m	150 pcs per pallet
CR1-CT300M	300	43	322	50	2.707/m	84 pcs per pallet

**Notes:**


- 1) CR1 has been tested in accordance with NEMA VE1 standard by a NATA certified testing facility. The deflection for continuous span is based on physical test results for easy reference. However, it cannot be applied to end spans. Please refer to NEMA VE2 installation guidelines for cable tray installations.
- 2) Supplied in 3m length.
- 3) Standard --- AS1397

**Flat Cover**

Technical Specification

**Assembly**

**Components**

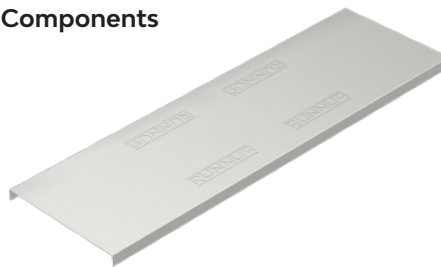

Plain Cover




Cover with "Warning Solar DC"

Part No. (Ordering Code)	Nominal Width (mm)	Overall Width (mm)	Length (mm)	Weight (kg)	Packaging
CR-CTFC150M	150	175	3000	0.954/m	150 pcs per pallet
CR-CTFCS150M					
CR-CTFC300M	300	325	3000	1.661/m	84 pcs per pallet
CR-CTFCS300M					


**Note:**

Standards --- AS1397 ( Labelling / Signs to AS/NZS5033 )


**Accessories**




**CR1-SPM**  
Splice Plate (\*1)  
2 Splices required per length of tray. Order fasteners separately for installation:  
2 x CR-SBS  
2 x CR-CS




**CR1-RM**  
Riser Link (\*1)  
6 Riser Links required to perform a 90° set. Order fasteners separately for installation (per Riser Link):  
2 x CR-SBS  
2 x CR-CS



**CR1-TM**  
Tee/Cross Bracket (\*1)  
2 TX Brackets required to make a tee; 4 required to make a cross. Order fasteners separately for installation (per Tee/Cross Bracket):  
4 x CR-SBS  
4 x CR-CS



**CR1-HM**  
Hold Down Unit (\*1)  
Order fasteners separately for installation



**CR-I-01**  
Tin Interface for Cable Tray (\*2)  
Bolts & washers included



**CR1-RPM**  
Radius Plate (\*1)  
Standard 2.0m length. Order fasteners separately for installation. Approximate length required to make a 150mm radius bend:

Tray Width	Length Required	Fasteners Required
150mm	0.7m	6
300mm	0.9m	6



**CR-SBS**  
Splice Bolt M10\*18 (\*3)



**CR-CS**  
Counterbore Nut (\*3)

**Note:**  
Standards --- (\*1) AS1397, (\*2) AS/NZS1866, (\*3) AS2837

**Order Method**

Example

**Cable Tray & Cover**

**CR1-CT 150 M**

Select **Cable Tray**      Select **Component**      Select **Width (mm)**      Select **Finish**

- CR** Clenergy RUNNUR Series
- CR1** Clenergy RUNNUR Series 1
- CT** Cable Tray
- CTFC** Cable Tray Flat Cover
- CTFCS** Cable Tray Flat Cover with "Warning Solar DC"
- 150**
- 300**
- M** Zinc/Magnesium/Aluminium Alloy Coating

**Accessories**

**CR1-SP M**

Select **Cable Tray**      Select **Accessory**      Select **Finish**

- CR** Clenergy RUNNUR Series
- CR1** Clenergy RUNNUR Series 1
- SP** Splice Plate
- R** Riser Link
- T** Tee/Cross Bracket
- RP** Radius Plate
- H** Hold Down Unit
- SB** Splice Bolt
- C** Counterbore Nut
- M** Zinc/Magnesium/Aluminium Alloy Coating
- S** Stainless Steel

  @runnurcabletrays     @Clenergy     @runnur

T: 03 9239 8088 | E: sales@clenergy.com.au | W: www.runnur.com.au