

Generator Change-Over Switch

SKU: ACB-GCS-1636TA, ACB-GCS-1636TN, ACB-GCS-1616TA, ACB-GCS-1616TN, ACB-GCS-1413TN, ACB-GCS-3436TA

ID: 3751, 3908, 3120, 3907, 3777, 3752




Images are indicative only and represent ID3120(left) and ID3777(right)

The quickest and neatest way to install a Generator Change-Over Switch

- Designed and certified by in-house registered professional engineers.
- Designed to comply with relevant Australian standards.
- Free technical support prior to purchasing and after sales.
- QR Code displayed on product, links to a changeover sequence video.
- Optional ammeter to view generator load.
- Tested for quality assurance.
- Engraved labelling.
- Trusted quality brands.

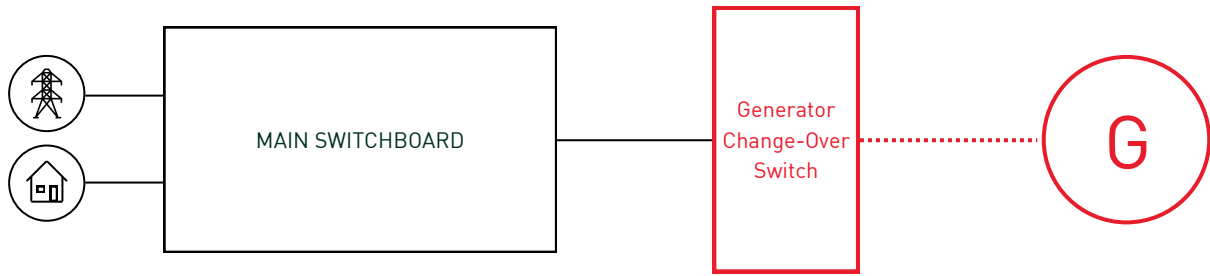


Typical system installation



Generator Change-Over Switch Specifications

| SKU | ACB-GCS-1636TA | ACB-GCS-1636TN | ACB-GCS-1616TA | ACB-GCS-1616TN | ACB-GCS-1413TN | ACB-GCS-3436TA |
|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Item Number | 3751 | 3908 | 3120 | 3907 | 3777 | 3752 |
| Changeover switch | 63A 1Ø | 63A 1Ø | 63A 1Ø | 63A 1Ø | 40A 1Ø | 40A 3Ø |
| Generator inlet | 32A 1Ø | 32A 1Ø | 15A 1Ø | 15A 1Ø | 15A 1Ø | 32A 1Ø |
| Ammeter | Yes | No | Yes | No | No | Yes |
| Weight [kg] | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 1.5 |
| Height [mm] | 197 | 197 | 197 | 197 | 305 | 197 |
| Width [mm] | 305 | 305 | 305 | 305 | 100 | 305 |
| Depth [mm] | 185 | 185 | 110 | 110 | 110 | 110 |
| IP Rating | IP66 | IP66 | IP66 | IP66 | IP66 | IP66 |
| Switchgear | Hager | Hager | Hager | Hager | Hager | Hager |
| Enclosure | Trader | Trader | Trader | Trader | Trader | Trader |

Pre wired leads also available

-  Any current rating
-  Any length
-  Any cable size