


# RAPID2+ PRO SML

- + For trapezoidal and corrugated shaped metal roofs
- + Pre-assembled with multi-adapter that is usable for both Proline and the Standard rails
- + Rail seat is height adjustable

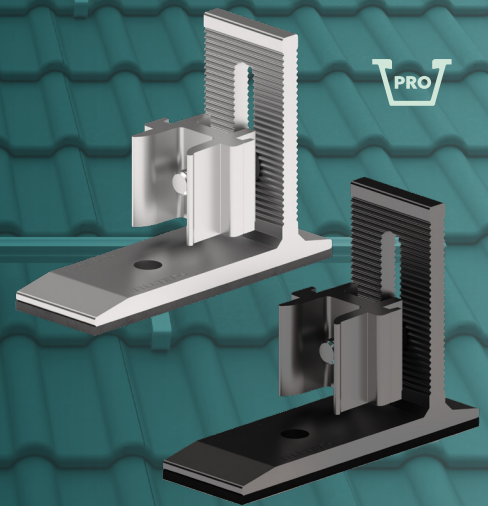


## OPTIMAL LOAD DISTRIBUTION

With its long base, the design of this special fastener minimises the forces on the roof sheet. This allows a good load introduction into the substructure.


## MINIMISING THE INSTALLATION EFFORT

The module beams are height adjustable on the fastener which allows for varying panel clearance to the roofing sheet based on application. The UV-resistant EPDM rubber underlay guarantees absolute water tightness. These installation practice-oriented features reduce the installation costs enormously.


Landscape

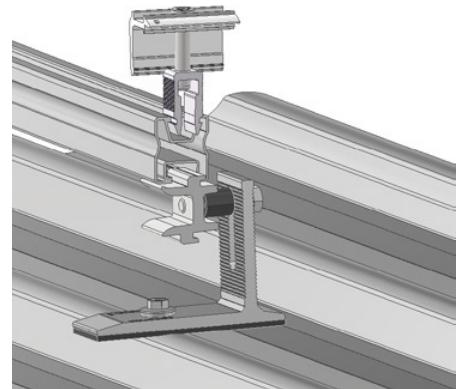


Portrait

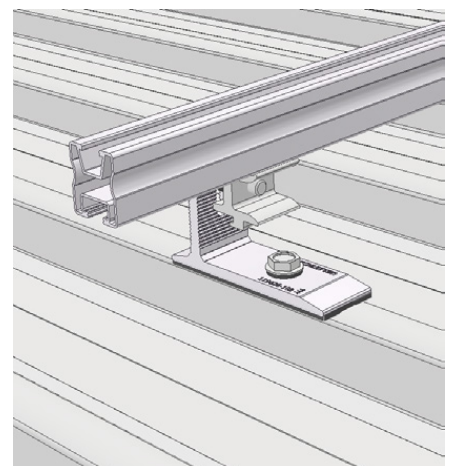

## POSSIBLE DIMENSIONS

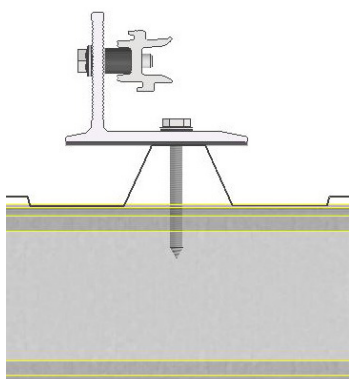

Fixing through trapezoidal roof sheet on purlin

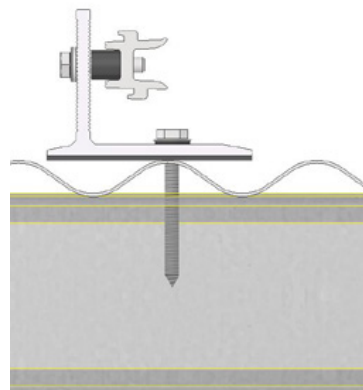


Fixing through corrugated roof sheet on purlin

## TECHNICAL DETAILS

|                                |                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scope of application</b>    | Non-concealed roofs with trapezoidal and corrugated profiles fixing into timber or metal substructure.                                                                                                                                                                                                                            |
| <b>Material</b>                | <ul style="list-style-type: none"> <li>+ Systems components:</li> <li>+ Aluminium fastening elements</li> <li>+ Stainless steel screws</li> <li>+ EPDM sealing rubber</li> </ul>                                                                                                                                                  |
| <b>Structural analysis</b>     | Structural analysis according to the current specific national standards (Australia AS/NZS 1170.2-2011). It also complies with DIN EN 1991-1 based on Eurocodes and general construction approvals. Roofing and building certificates are not included. Any instructions on required certification and approval must be observed. |
| <b>Required Tools</b>          | TORX T40, M14 socket                                                                                                                                                                                                                                                                                                              |
| <b>Warranty</b>                | 25 Years according to our warranty terms.                                                                                                                                                                                                                                                                                         |
| <b>Supplementary documents</b> | + Flush Mount Installation Manual                                                                                                                                                                                                                                                                                                 |

## ARTICLE OVERVIEW
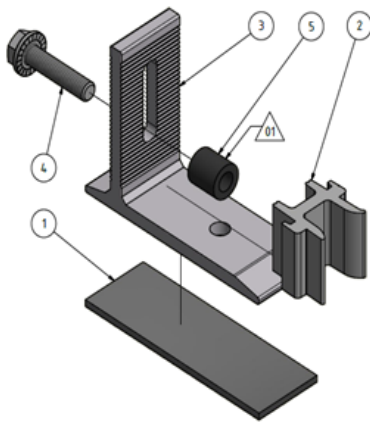
|                                                                                                                      |                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>119026-102</b>                                                                                                    | <b>Rapid2+ Pro SML with EPDM</b>                                                                                                                                                              |
| <b>119026-902</b>                                                                                                    | <b>Rapid2+ Pro SML with EPDM Black</b>                                                                                                                                                       |
| Accessories (pre-assembled)                                                                                          |                                                                                                                                                                                                                                                                                  |
| <b>1. 000021-335</b><br><b>2. 000023-051</b><br><b>3. 000023-088</b><br><b>4. 943000-070</b><br><b>5. 973001-016</b> | <p>EPDM rubber self-adhesive 35x3x105mm</p> <p>Clamping Part Rapid-Pro</p> <p>Rapid2+ Pro SML sawn punched</p> <p>BOLT HX TX LS M8X35, A2-70</p> <p>Rubber hose for compression spring</p>  |