



Solar DC Connectors Shroud


Assembly

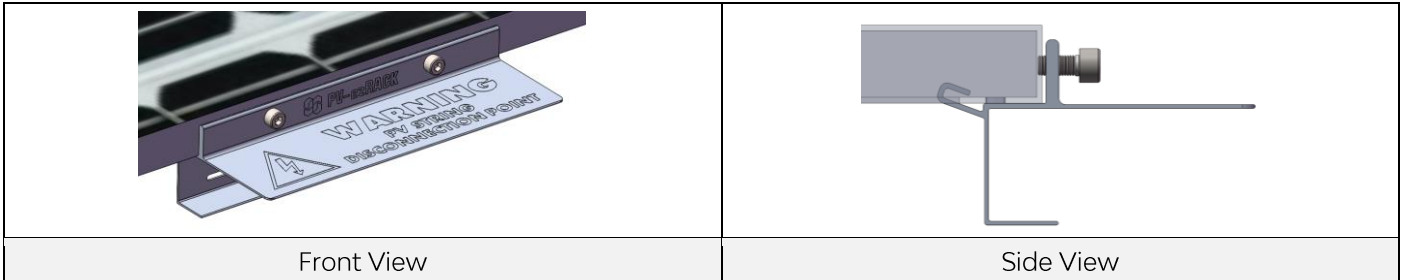

Component

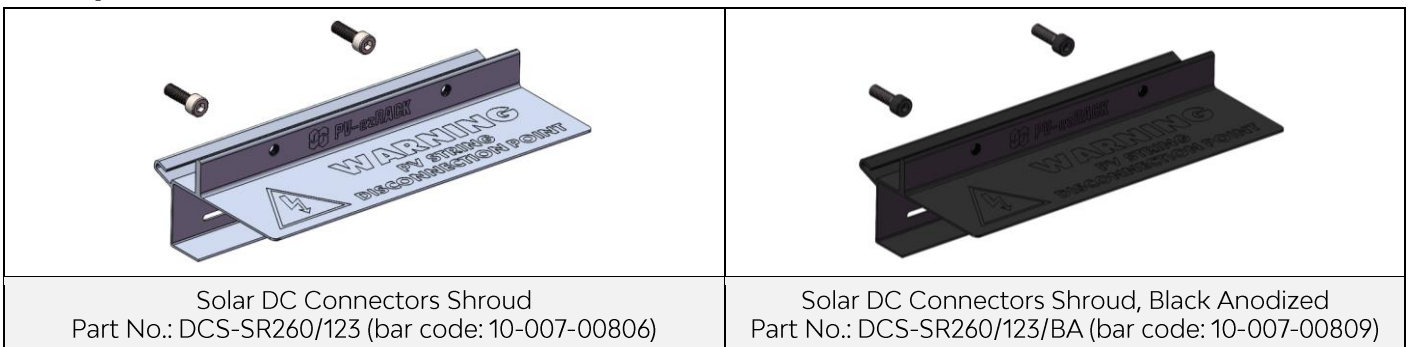

Technical Specification

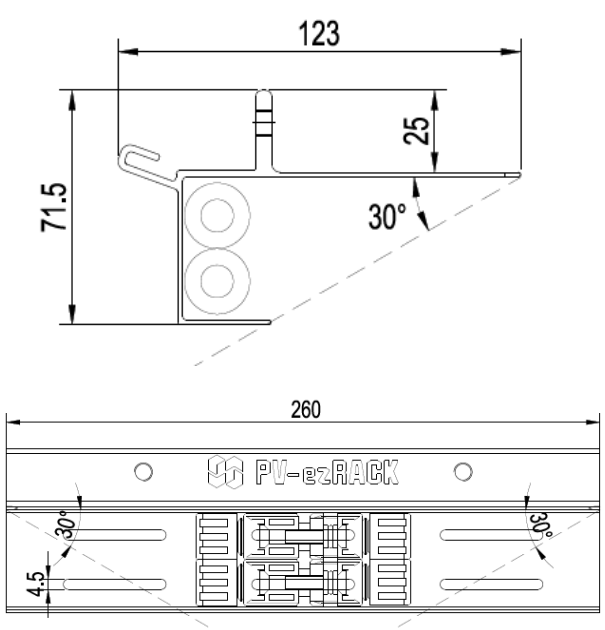Application	PV String Disconnection Point	
Fixing Method	Fixing on PV module frame	
PV Module Frame (underside) Width Requirement	29-35mm	
Recommended Fasten Torque	2-4 N·m	
Dimension	L260mm*W123mm*H71.5mm	
Packaging	DCS-SR260/123: 33 units per carton DCS-SR260/123/BA: 12 units per carton	
Weight	0.349 kg	
Packaging Dimension	L550*W265*H280mm (carton dimension)	
Material	AL6005-T5	
Color	DCS-SR260/123: Silver Anodized (no less than 10 μm, excluding machined surfaces) DCS-SR260/123/BA: Black Anodized (no less than 10 μm)	
Earthing	Yes- earthing continuity between frame and shroud through Hexagonal Bolts	